


trumaxx[®] Shaded Pole Motors

propelling progress

Drawing:

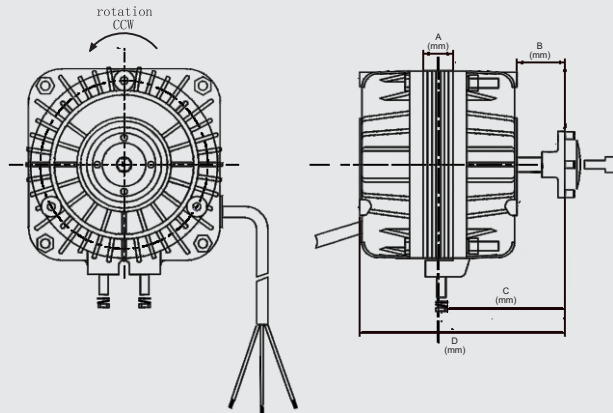

Additional Info

Model Type	A (mm)	B (mm)	C (mm)	D (mm)
SAFE-AC-05	13	14	44.5	77
SAFE-AC-10	19	13	42.5	82
SAFE-AC-16	25	19.4	49.8	95.5

Model Type	License	Rotation	Insulation	Protection
SAFE-AC-05	CE VDE CCC UL	CCW	B	IP42
SAFE-AC-10	CE VDE CCC UL	CCW	B	IP42
SAFE-AC-16	CE VDE CCC UL	CCW	B	IP42

Model Type	Voltage V	Frequency Hz	Rated Input W	Output W	Rated Current A	Rated Speed r/min	Fan Blade (Dia in mm)	Weight (kg)
SAFE-AC-05	230	50/60	33	05	0.21	1300	200	0.8
SAFE-AC-10	230	50/60	40	10	0.25	1300	230	1.1
SAFE-AC-16	230	50/60	70	16	0.45	1300	250	1.4